



Providing Solutions.


Phone: 916-638-7718 Fax: 916-638-2450

[www.scottmachinery.com](http://www.scottmachinery.com)

4700 Lang Ave, Suite D, McClellan, CA 95652

MODEL **613**

# Manual Bandsaw

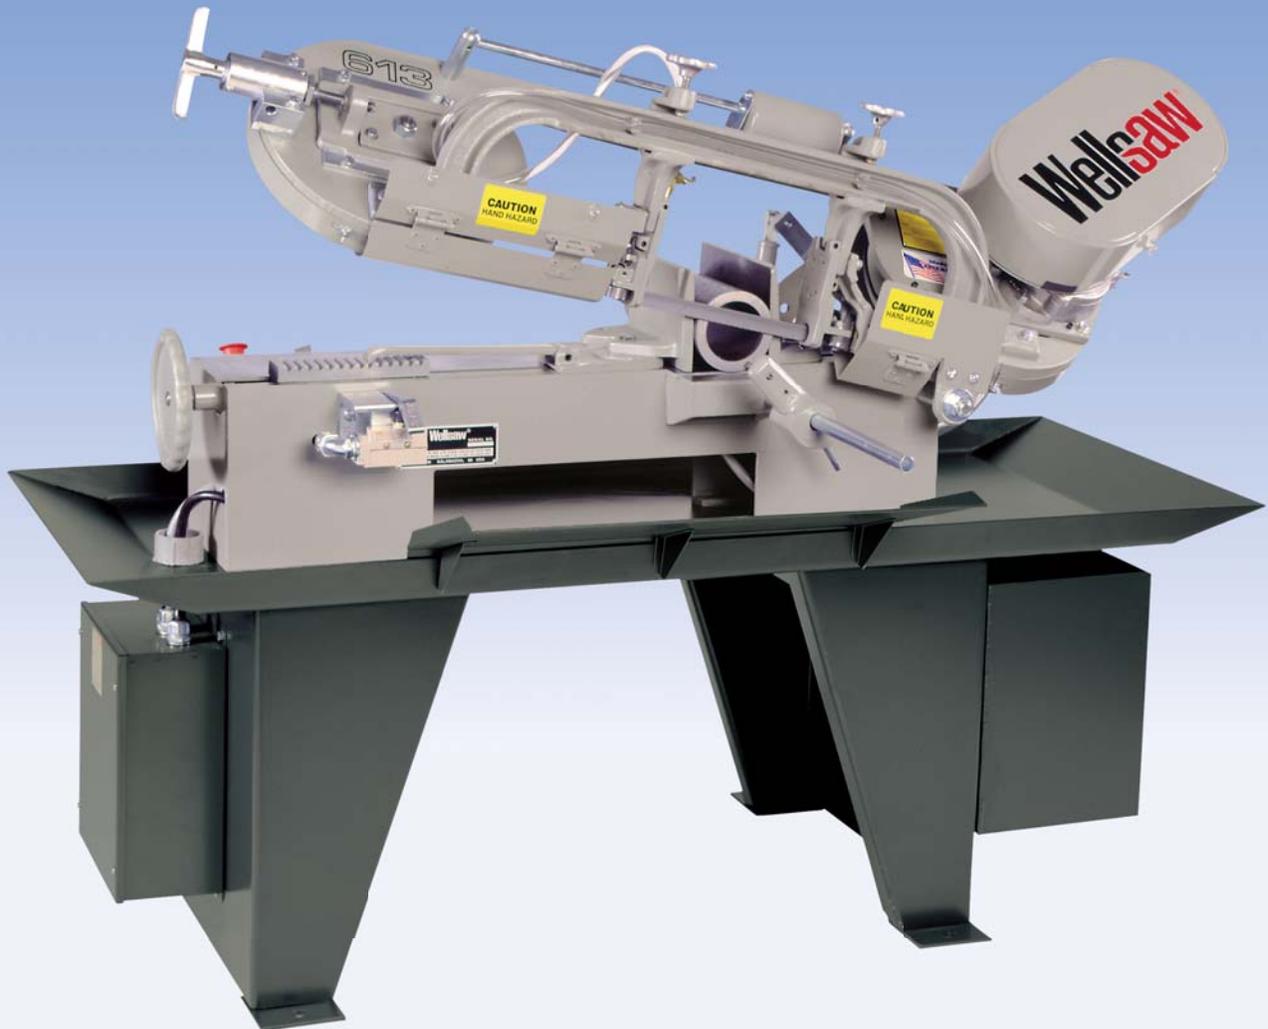

Manufactured in the United States of America

# Wellsaw<sup>®</sup>

Built better to work stronger and last longer

# 613

## Model 613 Manual Bandsaw



### Standard Features

Hydraulic Feed Control with Adjustable Counterbalance Spring
Ball Bearing Blade Guides
Perimeter Ring Gear Blade Drive
1hp Baldor® Motor
Four Blade Speeds
Rite-Tension® Band Tensioning Device
Wet Cutting System
Blade Brush
110 Volts at Controls
Overload and Undervoltage Protection
Precision Ground Bed
Quick Acting Vise
Positive Frame Lock
Adjustable Stock Stop
Auto Shut-Off at End of Cut
OSHA Blade Guarding
Tiger-Tooth® Bi-Metal Blade
Coolant for Initial Start-Up

### Available Factory Installed Options

Variable Speed Blade Drive (70-375 SFPM)
Casters (Set of 4, 2 Locking)
NFPA Electrics (with Disconnect)
Totally Enclosed Motor
Work Light with Transformer
Stock Stand
5' and 10' Non-Powered Conveyors

### Specifications

Capacity	
Round	7"
Flat	13"
Rectangular	6" x 13"
45° Angle	6" x 6-1/2"
Blade Size	3/4" x .035" x 8'3"
Blade Speeds	50-90-160-250 SFPM
Blade Guides	Six Sealed Ball Bearings
Blade Tension	Manual Rite-Tension®
Electrical Options	115-208-230/60/1 or 208-230-460/60/3
Coolant System	
Tank Capacity	8 Gallons
Submersible Pump	115V/.6 Amp/170 GPH
Vise Control	Manual Screw
Swivel Vise	To 45°
Feed Control	Hydraulic with Adjustable Counterbalance
Band Wheels	11" Diameter Cast Iron
Bed Height	29"
Floor Area	25"W x 60"L
Shipping Weight	Approx. 650 Lbs.

# Wellsaw®