



Providing Solutions.


Phone: 916-638-7718 Fax: 916-638-2450

www.scottmachinery.com

4700 Lang Ave, Suite D, McClellan, CA 95652

MODEL **1016**

Manual Bandsaw

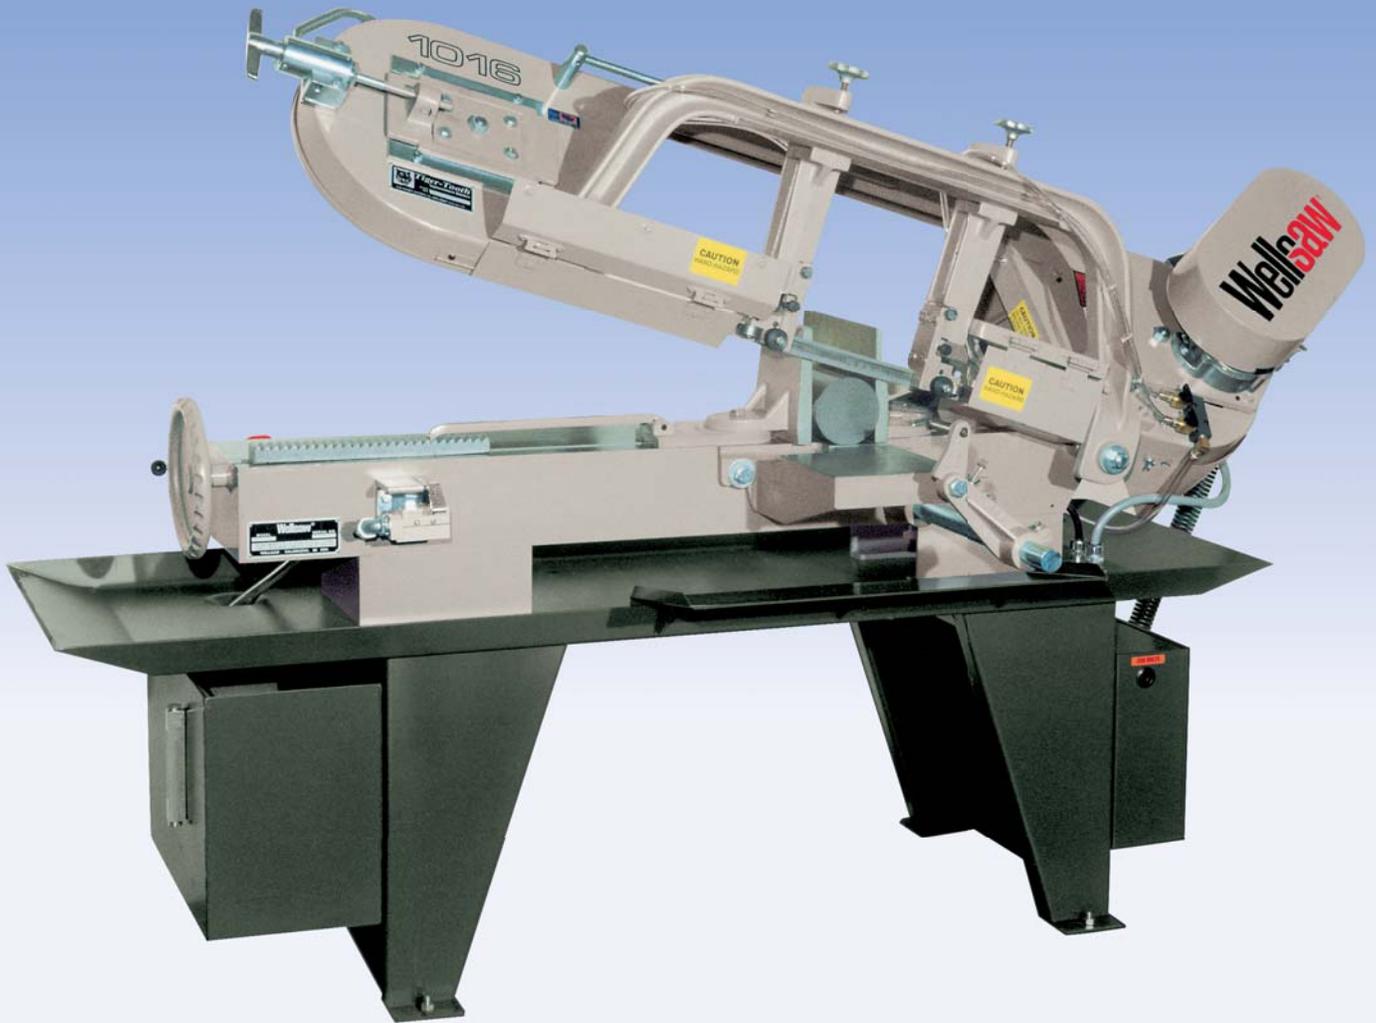

Manufactured in the United States of America

Wellsaw®

Built better to work stronger and last longer

1016

Model 1016 Manual Bandsaw



Standard Features

Spring-Loaded Carbide Guides with Rollers
Combination Reduction Gearbox and Perimeter Ring Gear Blade Drive
2hp Baldor® Motor
Four Blade Speeds
Rite-Tension® Band Tensioning Device
Variable Hydraulic Downfeed Control
Flood Type Wet Cutting System
Rotary Blade Brush
110 Volts at Controls
Overload and Undervoltage Protection
Precision Ground Bed
Quick Acting Vise
Positive Frame Lock
Adjustable Stock Stop/Back-Gauge
Auto Shut-Off at End of Cut
OSHA Blade Guarding
Tiger-Tooth® Bi-Metal Blade
Coolant for Initial Start-Up

Available Factory Installed Options

Variable Speed Blade Drive (70-375 SFPM)
Casters (Set of 4, 2 Locking)
NFPA Electrics (with Disconnect)
Working Light with Transformer
Stock Stand, 18"
5' Non-Powered Roller Conveyor
10' Non-Powered Conveyors

Specifications

Capacity	
Round	10.5"
Flat	16.5"
Rectangular	10" x 16"
45° Angle	10" x 9"
Blade Size	1" x .035" x 11'6" (138")
Blade Speeds	50-100-175-275 SFPM
Blade Guides	Carbide Guides with Rollers
Blade Tension	Manual Rite-Tension®
Electrical Options	115-208-230/60/1 or 208-230-460/60/3
Coolant System	Tank Capacity 8 Gallons Submersible Pump 115V/ .6 Amp/170 GPH
Vise Control	Quick Acting/Manual Screw
Swivel Vise	To 45°
Feed Control	Variable Hydraulic with Counterbalance Spring
Band Wheels	15" Diameter Cast Iron
Bed Height	29"
Floor Area	40"W x 84"L
Shipping Weight	900 Lbs.

Wellsaw®