

# Utility H-frame Presses

The power of hydraulic pressure in a compact design

## features

- Fast, efficient single speed hand pump with adjustable mounting for maximum ergonomic operation.
- Large diameter, single acting polished piston with internal spring return to eliminate external pinch points.
- Convenient top mounted gauge reads in tons and psi to monitor pressure.
- The hydraulic pressing cylinder can be relocated right or left of center for unusual work pieces.
- Table can be adjusted for maximum or minimum vertical opening to accommodate a variety of work pieces and to minimize required ram travel.



## specifications

<i>model</i>	<i>number</i>	<i>operation</i>	<i>capacity</i>	<i>weight</i>
			<i>press</i>	
			<i>tons</i>	<i>pounds</i>
B-10	72200	manual	10	165
F-10	72210	manual	10	225



For more information call 800-937-3253

## models

### B-10


- 10 ton capacity
- bench mounted

### F-10

- 10 ton capacity
- floor mounted

## standard equipment

- Frame
- Combination table plates and V-blocks
- Flat ram nose
- Step reduced ram nose (shown)

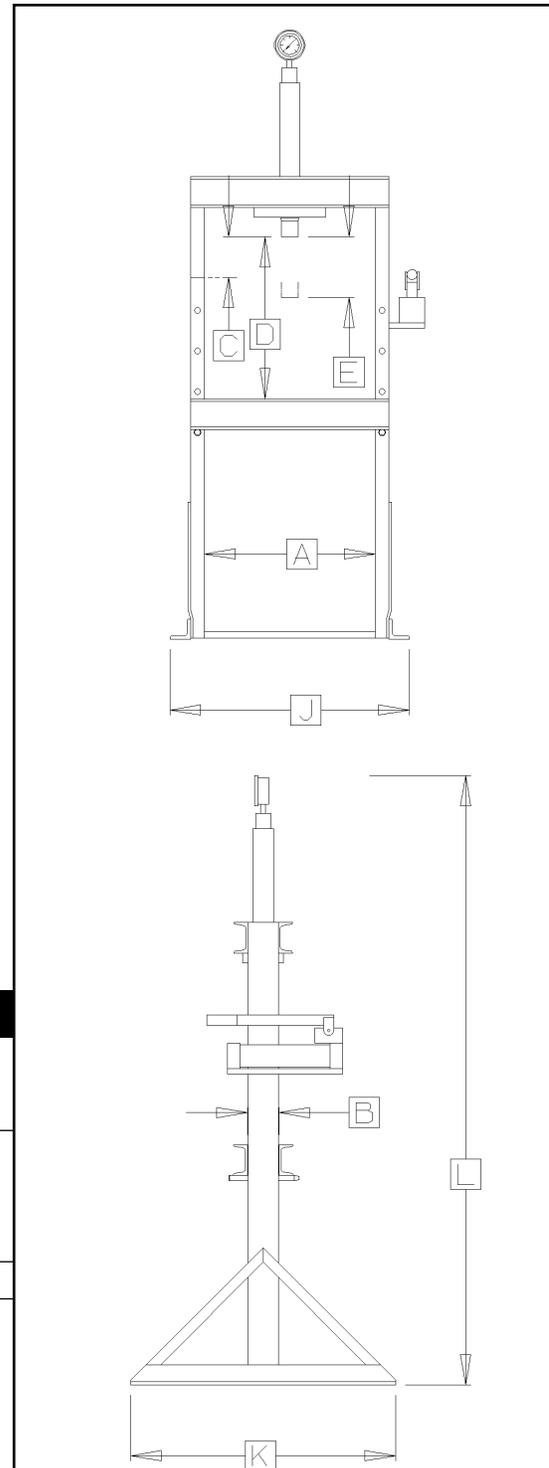

A	B	C	D	E	J x K	L
width between uprights	width between table channels	minimum ram to table	maximum ram to table	ram travel	base	height
inches	inches	inches	inches	inches	inches	inches
16 <sup>3</sup> / <sub>4</sub>	3	4	16	6	23x18	36
16 <sup>3</sup> / <sub>4</sub>	3	0-4	38	6	24x28	60