Utility H-frame Presses

The power of hydraulic pressure in a compact design

2504 Mercantile Drive, Unit C • Rancho Cordova, CA 95742 Ph #916-838-7718 • Fx #916-838-2450 Email: sale&g:southachinery.com Visit us on the web: www.soottmachinery.com

Machine Tool

features

- Fast, efficient single speed hand pump with adjustable mounting for maximum ergonomic operation.
- Large diameter, single acting polished piston with internal spring return to eliminate external pinch points.
- Convenient top mounted gauge reads in tons and psi to monitor pressure.
- The hydraulic pressing cylinder can be relocated right or left of center for unusual work pieces.

Table can be adjusted for maximum or minimum vertical opening to accommodate a variety of work pieces and to minimize required ram travel.



specifications

	lel number operation capacity weight							
model	number	operation	capacity	weight				
			press					
			tons	pounds				
B-10	72200	manual	10	165				
F-10	72210	manual	10	225				



STANDARD PRESSES

®

For more information call 800-937-3253




2504 Mercantile Drive, Unit C • Rancho Cordova, CA 95742 Ph. #916-638-7718 • Fx #916-638-2450 Email: sales@scottmachinery.com Visit us on the web: www.scottmachinery.com



B-10

standard equipment

- Frame
- Combination table plates and V-blocks
- Flat ram nose
- Step reduced ram nose (shown)




DA



■ 10 ton capacity

floor mounted

Α	В	С	D	Ε	J × K	L
width between uprights	width between table channels	minimum ram to table	maximum ram to table	ram travel	base	height
inches	inches	inches	inches	inches	inches	inches
16 ³ /4	3	4	16	6	23x18	36
16 ³ /4	3	0-4	38	6	24x28	60

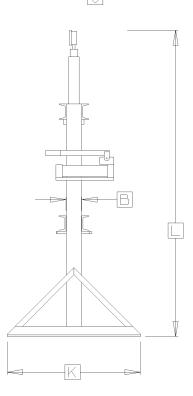

A