


Dimensions:

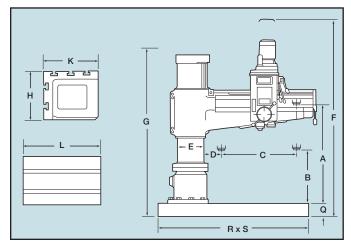

Capacities:

Model	CL2000H
Capacity:	
Drilling	
In Steel	2.6" (65mm)
In Cast Iron	2.75" (70mm)
Tapping In Steel In Cast Iron	1.97" (50mm) 2.36" (60mm)
Boring In Steel In Cast Iron	5" (126mm) 7.28" (185mm)

Clausing Radial Drills Model: CL2000H

Features and Standard Equipment:

- Equipped with hydraulic separate clamping unit. Vertical
 movement of arm is coordinated by an IC timer. With a single
 touch on push button switch, you can have the arm unclamped then
 move vertically, or stop then clamp automatically. Very easy to
 operate, and tools will always stay at the same point after tool shifting.
- Gears in gear box are cooled by oil cycled by an oil pump to minimize gear wear.
- Friction type disc clutch absorbs impact force caused by vertical movement of spindle, and protects all transmission units inside gear box. With quick spindle return, the clutch will help speed-up the tapping operation.
- Special automatic tool eject device is supplied to allow you to change tools quickly. (No drifter is required) Special arm elevating device is provided to prevent arm from falling down abruptly after years of usage.
- Coolant system
- CSA Electrics Standard
 Tool kit and manuals

Specifications:

•		
Model	CL2000H	
Working Area:		
Column Sleeve Dia. (E)	17" (432mm)	
Column Face to Spindle Center	, ,	
Maximum (D+C)	78.7" (2000mm)	
Minimum (D)	19.3" (490mm)	
Spindle Head Travel (C)	59.4" (1510mm)	
Base Surface to Spindle End		
Maximum (A)	74.8" (1900mm)	
Minimum (B)	19.7" (500mm)	
Arm Vertical Travel (A-B)	43.3" (1100mm)	
Arm Rotation (Right & Left)	180°	
Baseplate Working Surface		
Box Table Area		
Length (L)	39.3" (1000mm)	
Width (K)	31.5" (800mm)	
Height (H)	19.7" (500mm)	
Base Dimensions		
Floor Area (R x S)	114.5" x 43.3" (2908 x 1102mm)	
Height (Q)	98.4" (250mm)	
Drill Head:		
Spindle Taper	5MT	
Spindle Stroke	14.6" (370mm)	
Quill Diameter	3.94" (100mm)	
Number of Spindle Speeds	12	
Spindle Speeds (rpm)	35-1890	
Number of Steps	6	
Spindle Feed Rate (in(mm)/rev.)	0.003"(.07mm)-0.038"(.96mm)	
Spindle Drive Motor (2-speed)	7.5 hp (5.6 Kw)	
Elevating Motor	3 hp (2.25 Kw)	
Clamping Motor	1 hp (.75 Kw)	
Coolant Pump Motor	1/8 hp (.10 Kw)	
Dimensions and Weight		
Max. Machine Height (F)	124.8" (3470mm)	
Base and Column Height (G)	116.5" (2960mm)	
Shipping Dim.		
Length	122.2" (3105mm)	
Width	55.1" (1400mm)	
Height	127.5" (3240mm)	
Net Weight	13,448 lbs. (6100kg)	
Shipping Weight	14,550 lbs. (6600kg)	